# LOUISA CHANDELIER





# LOUISA CHANDELIER

## **NOTICE:**

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect the item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

## **BEFORE YOU BEGIN**


- Have the chandelier installed by a qualified electrician, following local electrician codes.
- Switch off power at the breaker before starting, and use a voltage tester to confirm there is no live current.
- Make sure the ceiling steructure or junction box can support at least twice the chandelier's total weight.
- Check the LED driver for dimmer compatibility before installation


#### 1. Test the fixture

- Before mounting, connect the fixture temporarily to a safe power source.
- Ensure all light modules or bulbs illuminate correctly.
- Disconnect after testing.

#### 2. Prepare the Work Area

- Lay a soft cloth or blanket under the installation area to catch any dropped parts.
- Unpack all components and check against the parts list.
- Remove any protective films from metal surfaces that will be hidden after assembly



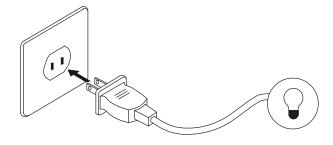



## 3. Remove Mounting Plate

- Remove canopy from the mounting plate.
- Secure the plate to the ceiling box or structure with nuts/screws.
- Make sure it is level.

#### 4. Assemble the Light Bar

- Connect any structural pieces, such as ring lights or rods, to the main body.
- Secure with the provided nuts.
- Check that all connections are tight but avoid overtightening.



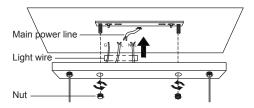



#### 5. Electrical Connections

- Connect ground (green/yellow) to ground.
- Connect hot (black/brown) to supply hot, neutral (white/blue) to supply neutral.
- For dimming, connect control leads as required: cap unused leads.
- Keep AC and low-voltage wires separated.

#### 6. Attach Bar and Install Globes

- Fix the light bar to the mounting plate using nuts on both sides.
- Install light bulbs or connect integrated LED modules.
- Carefully attach each glass globe using the holder/ring.
- Tighten gently.
- Ensures globes are evenly spaced and aligned.



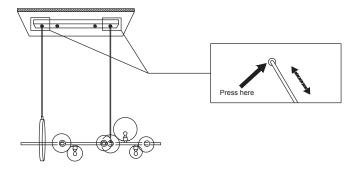

## 7. Adjust Height

- Press cable gripper tabs to raise/lower each suspension cable until the bar is level.
- Set final height (typically 30-36" above a dining table).
- Trim excess cable above grippers, leaving a small loop if space allows.

## 8. Final Alignment & Cable Management

- Check that the fixture is centered over the table or target space.
- Ensure all cables hang straight without twists.
- Neatly tuck any extra wiring inside the canopy.



## WARRANTY INFORMATION

# Damages or Issues:

- Start a return/exchange online and mark the item as damaged
- After 30 days, coverage applies only with an extended warranty
- Submit photos/videos we'll assess and offer a replacement

# Standard Warranty

All fixtures are covered for manufacturer defects for 30 days. Contact us with proof for a free replacement.

# **Extended Warranty**

Available for 12, 36, or 60 months. Includes:

- Free instant replacements
- Accident & manufacturer protection
- Component coverage (excludes bulbs)

## Contacts



Shop Online at www.residencesupply.com



Follow our Instagram @residencesupply



24/7 Customer Service +1 (800)-791-7436